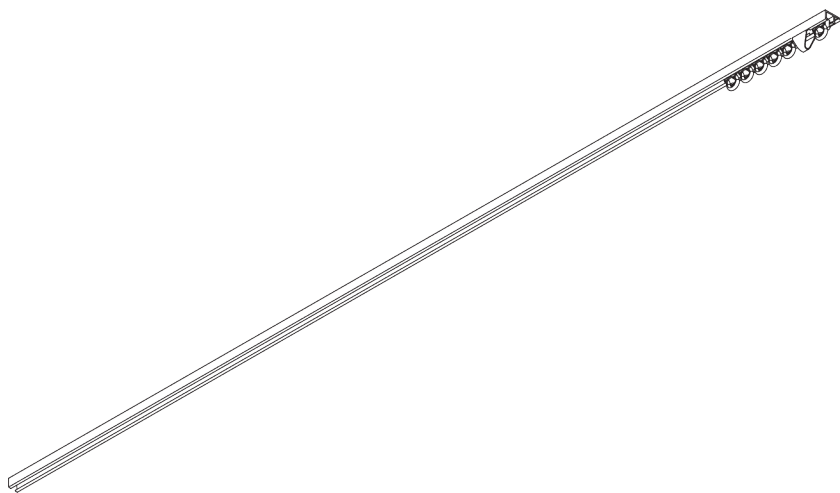


SG 1025



PRODUCT INFORMATION

- **Operation:** hand
- **Range:** S
- **Fitting:** ceiling
- **Colours:** white RAL 9016 or anodised aluminum, special colours possible
- **Fabrics:** refer to Silent Gliss fabric collection


Features:

- Pre-drilled profile
- Bendable

SYSTEM SPECIFICATIONS


A. PROFILE

Profile and bending information




SG 1025p

Profile



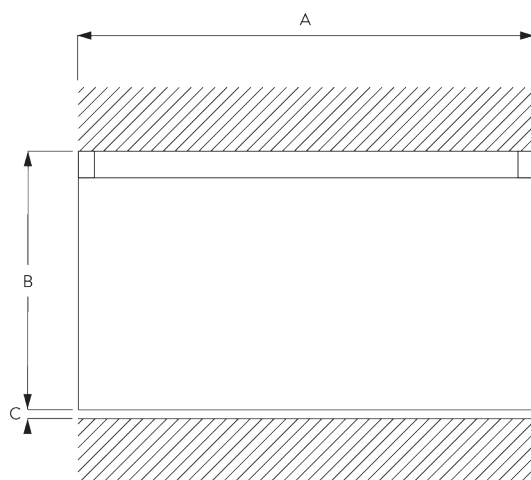B. HOW TO MEASURE



A: System width

B: System height

C: Distance between floor and fabric

C. SPECIFICATION

TEXT

EN

Silent Gliss SG 1025 Hand Drawn Curtain Track System for recessed fitting. Comprises aluminium profile SG1025 supplied made to measure in silver anodised or white powder coated, alternatively a specified RAL colour. SG 3533 at 14/m and 2 end stops SG 3070/SG 3085 Spring stops per length. Top fixed directly to ceiling with screws at. max. 300 mm centres.

SV

Silent Gliss SG 1025 handdragssystem. Består av aluminiumprofil SG 1025 i specificerad längd i vitlack, alu natur eller angiven RAL färg. 14 st SG 3533 glid per meter, 2 st SG 3070 vridstopp/SG 3085 fjäder per system. Skruvas direkt i tak m skruv c/c 300 mm.

NO

Silent Gliss SG 1025 manuell gardinskinne. Består av aluminiumprofil SG 1025 i spesifisert lengde, standard i hvitlakkert eller alu natur. Kan også leveres i spesifisert RAL farge. 14 stk SG 3533 glide per meter, 2 stk SG 3070 vridstopp/SG 3085 fjær pr system. Skrus direkte i tak med skrue c/c 300 mm.

DA


Silent Gliss SG 1025 håndtrukket gardinskinnesystem til indfældning. Består af en aluminiumprofil SG1025 i ønsket længde, sølvanodiseret eller hvid pulverlakering, alternativt en specificeret RAL-farve. 14 stk. SG 3533 pr. m og 2 stk. SG 3070 endestop eller SG 3085 fjeder pr. længde. Fastgøres direkte i loftet med skruer med højst 300 mm afstand.

FITTING

A. FITTING INFORMATION


For detailed fitting information, visit the Silent Gliss website.

Fixing points



B. CEILING FITTING

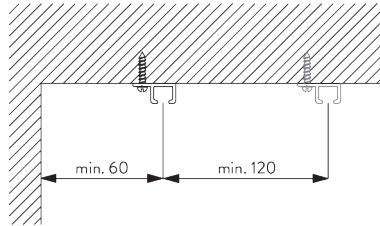Direct into wood



GENERAL NOTES

Dimensions

- Measurements are in mm except where indicated.
- Max. kg relates to fabric incl. accessories.
- Stack size depends on curtain make-up and fabric thickness.
- Distance between gliders max. 80 mm / distance between rollers max. 100 mm.
- Recommended distance floor / fabric: 20 mm.
- In order to determine system height (B), the smallest room height must be taken into account.

Fitting




- Installation by qualified fitter only.
- Number of brackets and fitting positions / fixing points vary depending on fitting surface, system weight, fabric make-up, screw / fixing type and obstacles.
- Qualified fitter must use appropriate screws / fixings for each situation.
- Profile lip if applicable to be installed to room side.

Child Safety

- All relevant Silent Gliss systems correspond to child safety EN 13120.
- All parties involved must comply with EN 13120.








PARTS

A. STANDARD PARTS

	SG 1025p Profile
	SG 3070 End stop
	SG 3085 Spring stop
	SG 3533 Glider
	SG 10896 Pan head screw 2.9x13

B. OPTIONAL PARTS

	SG 3012 Hook
	SG 3016 End stop
	SG 3020 Hook
	SG 3032 Spring stop
	SG 3071 End stop
	SG 3072 Eyelet
	SG 3088 Endstop with hook
	SG 3511 Glider
	SG 3534 Glider 3533 on strip
	SG 3535 Glider
	SG 3537 Glider
	SG 3548 Glider
	SG 3549 Click glider with hook
	SG 3555 Hook

	SG 3570 Glider
	SG 3571 Hook
	SG 3582 Hook
	SG 3598 Eyelet
	SG 3599 Hook
	SG 10430 Draw rod 50 cm
	SG 10431 Draw rod 75 cm
	SG 10432 Draw rod 100 cm
	SG 10433 Draw rod 125 cm
	SG 10434 Draw rod 150 cm
	SG 11335 End stop