


# MOTORS AND CONTROLS

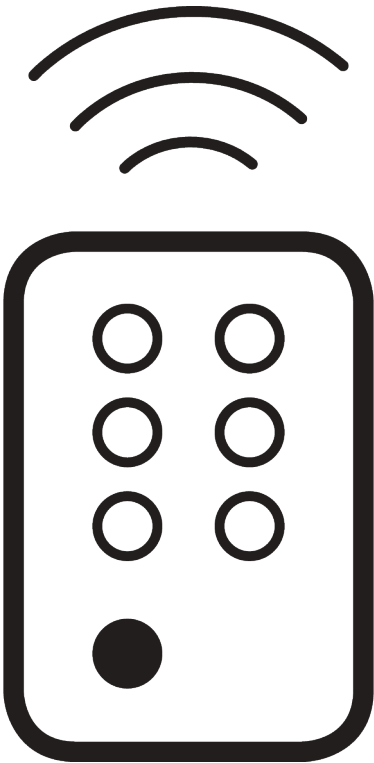

# GENERAL NOTES

- *Installation by qualified fitter only.*
- *All radio installations must be installed according to local regulations.*
- *Electrical installations must be carried out according to Silent Gliss wiring diagrams.*
- *Check space for cables and plugs!*



# APPLICATION CHART

<u>PAGE</u>	<u>SYSTEM</u>
5	<b>SG Control A</b>
11	<b>SG Control N</b>
19	<b>SG Smart</b>



# SG Control A

---

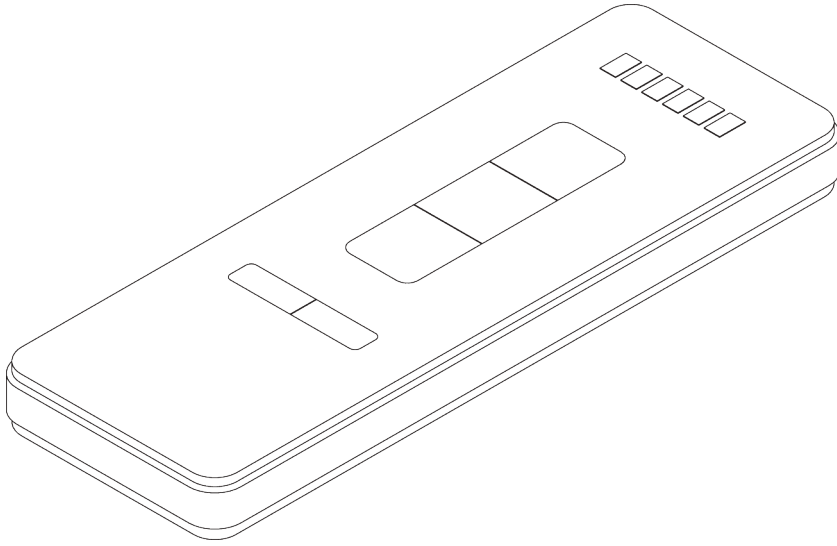

## PRODUCT INFORMATION

- *Radio controlled*
- *1-channel, 2-channel, 5-channel or 6-channel radio controls*
- *Radio hand held and wall controls*
- *Single and multi channel timer units*


# APPLICATION

## A. SYSTEMS

- Electric curtain track system SG 5100
- Panel Glide System SG 2750

# OVERVIEW COMPONENTS

## A. RADIO CONTROLS




### **SG 10946**

- **Channel:** 1 channel
- **Frequency:** 433.92 MHz
- **Colours:** white

#### **Features:**

- Operates single system or operates one group of systems




### **SG 10947**

- **Channel:** 2+1 channel
- **Frequency:** 433.92 MHz
- **Colours:** white

#### **Features:**

- 2 channel: operates up to two single systems individually
- 2 channel: operates up to two groups of systems individually
- 1 channel: operates all systems together




### **SG 10948**

- **Channel:** 6+1 channel
- **Frequency:** 433.92 MHz
- **Colours:** white

#### **Features:**

- 6 channel: operates up to 6 single systems individually
- 6 channel: operates up to 6 groups of systems individually
- 1 channel: operates all systems together

## **B. RADIO WALL** **CONTROLS**




### **SG 10949**

- **Channel:** 1 channel
- **Frequency:** 433.92 MHz
- **Colours:** white

#### **Features:**

- Operates single system or operates one group of systems




### **SG 10950**

- **Channel:** 2 channel
- **Frequency:** 433.92 MHz
- **Colours:** white

#### **Features:**

- 2 channel: operates up to two single systems individually
- 2 channel: operates up to two groups of systems individually



### **SG 10951**

- **Channel:** 5+1 channel
- **Frequency:** 433.92 MHz
- **Colours:** white

#### **Features:**


- 5 channel: operates up to 5 single systems individually
- 5 channel: operates up to 5 groups of systems individually
- 1 channel: operates all systems together

## **C. MANUALS**

Refer to Silent Gliss website.

# COMBINATION CONTROLS AND SYSTEMS

## A. EXAMPLE

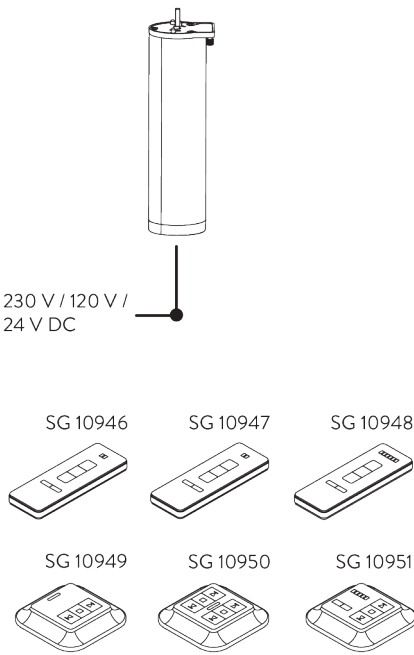

Applicable with following systems:

- Electric curtain track system SG 5100
- Panel Glide System SG 2750

## B. WIRING DIAGRAMS



Refer to Silent Gliss website.



# PARTS

## A. CONTROLS



**SG 10946**  
*Radio hand held 1 channel*



**SG 10947**  
*Radio hand held 2+1 channel*




**SG 10948**  
*Radio hand held 6+1 channel*



**SG 10949**  
*Radio wall transmitter 1 channel*



**SG 10950**  
*Radio wall transmitter 2 channel*




**SG 10951**  
*Radio wall transmitter 5+1 channel*



# SG Control N

---



## PRODUCT INFORMATION

- *Radio controlled*
- *Bi directional*
- *Radio hand held controls: 1-channel or 6-channel*
- *Radio wall controls, 1-channel or 6-channel*
- *Radio receivers for motors without integrated receiver*
- *Silent Gliss Move App*


# APPLICATION

## A. SYSTEMS

- Dim-out blind system SG 4760
- Dim-out blind system SG 4770
- Dim-out blind system SG 4780
- Electric curtain track system SG 5600
- Electric curtain track system SG 5800
- Panel Glide System SG 2750
- Roller blind system SG 4955
- Roller blind system SG 4960
- Roller blind system SG 4970
- Roller blind system SG 4980
- Roller blind system SG 4985
- Roman blind system SG 2355
- Roman blind system SG 2360
- Skylight shading system SG 2195
- Skylight shading system SG 8600
- Skylight shading system SG 8640
- Venetian blind system SG 8250
- Venetian blind system SG 8960
- Vertical blind system SG 2960

# OVERVIEW COMPONENTS

## A. RADIO CONTROLS




### **SG 11931**

- **Channel:** 1 channel
- **Frequency:** 433 MHz
- **Colours:** white, black

#### **Features:**

- Operates single system or operates one group up to 5 systems
- Wall holder in corresponding colour




### **SG 11932**

- **Channel:** 6 channel
- **Frequency:** 433 MHz
- **Colours:** white, black

#### **Features:**

- 6 channel: operates up to 6 single systems individually
- 6 channel: operates up to 6 groups of up to 5 systems individually
- Several channels can be operated simultaneously
- Saves the selection of channels
- Wall holder in corresponding colour

## **B. RADIO WALL CONTROLS**




### **SG 11936**

- **Channel:** 1 channel
- **Frequency:** 433 MHz
- **Colours:** white

#### **Features:**

- Operates single system or operates one group of up to 5 systems



### **SG 11937**

- **Channel:** 6 channel
- **Frequency:** 433 MHz
- **Colours:** white

#### **Features:**

- 6 channel: operates up to 6 single systems individually
- 6 channel: operates up to 6 groups of up to 5 systems individually
- Several channels can be operated simultaneously
- Saves the selection of channels

## **C. MOVE BY SILENT GLISS**




### **SG 11900**

- **Frequency:** 433, 868 MHz
- **Colours:** black

#### **Features:**

- Operates up to 40 single systems individually
- App available for Android and IOS
- Various languages
- Programmable day and week, sunrise and sunset time
- Holiday mode
- Customised automation

## **D. RADIO RECEIVERS**




### **SG 11938**

- **Channel:** 1 channel
- **Frequency:** 433 MHz
- **Voltage:** 100-240 V / 50/60 Hz

#### **Features:**

- Operates single system
- Flush mounting




#### **SG 11939**

- **Channel:** 1 channel
- **Frequency:** 433 MHz

#### **Features:**

- Only applicable with motor SG 9060 (electric curtain track system SG 5600)

### **E. RELAY**



#### **SG 11946**

- **Voltage:** 240 V / 50 Hz

#### **Features:**

- Potential separation


### **F. MANUALS**

*Refer to Silent Gliss website.*

# COMBINATION CONTROLS / RECEIVERS AND SYSTEMS

## A. EXAMPLES


### Motors with integrated receiver

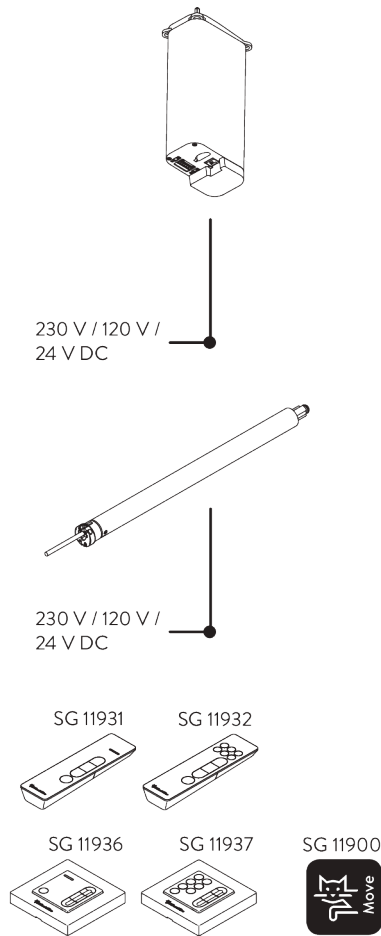

Applicable with following systems:

- Dim-out blind system SG 4760
- Dim-out blind system SG 4770
- Dim-out blind system SG 4780
- Electric curtain track system SG 5600
- Panel glide system SG 2750
- Roller blind system SG 4955
- Roller blind system SG 4960
- Roller blind system SG 4970
- Roller blind system SG 4980
- Roller blind system SG 4985
- Roman blind system SG 2355
- Roman blind system SG 2360
- Vertical blind system SG 2960
- Venetian blind system SG 8960 (230 V)


## Motors without integrated receiver

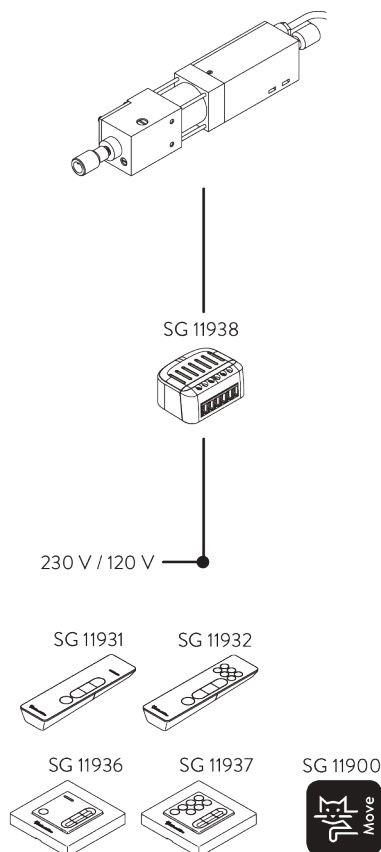

Applicable with following systems:

- Electric curtain track system SG 5800
- Skylight shading system SG 2195
- Skylight shading system SG 8600
- Skylight shading system SG 8640

## 24 V DC motors without integrated receiver

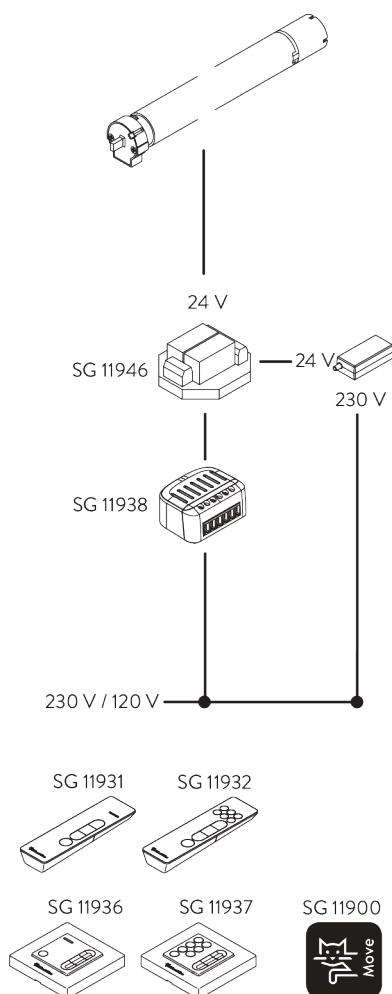

Applicable with following systems:

- Venetian blind system SG 8250











**B. WIRING**  
**DIAGRAMS**



*Refer to Silent Gliss website.*


# PARTS

## A. CONTROLS / RECEIVERS

	<b>SG 11900</b> <i>Move Server</i>
	<b>SG 11931</b> <i>Radio hand held 1 channel</i>
	<b>SG 11932</b> <i>Radio hand held 6 channel</i>
	<b>SG 11936</b> <i>Radio wall transmitter 1 channel</i>
	<b>SG 11937</b> <i>Radio wall transmitter 6 channel</i>
	<b>SG 11938</b> <i>Radio receiver BiDi Shutter</i>
	<b>SG 11939</b> <i>Radio modul control N</i>
	<b>SG 11946</b> <i>Relay</i>

# SG Smart

---

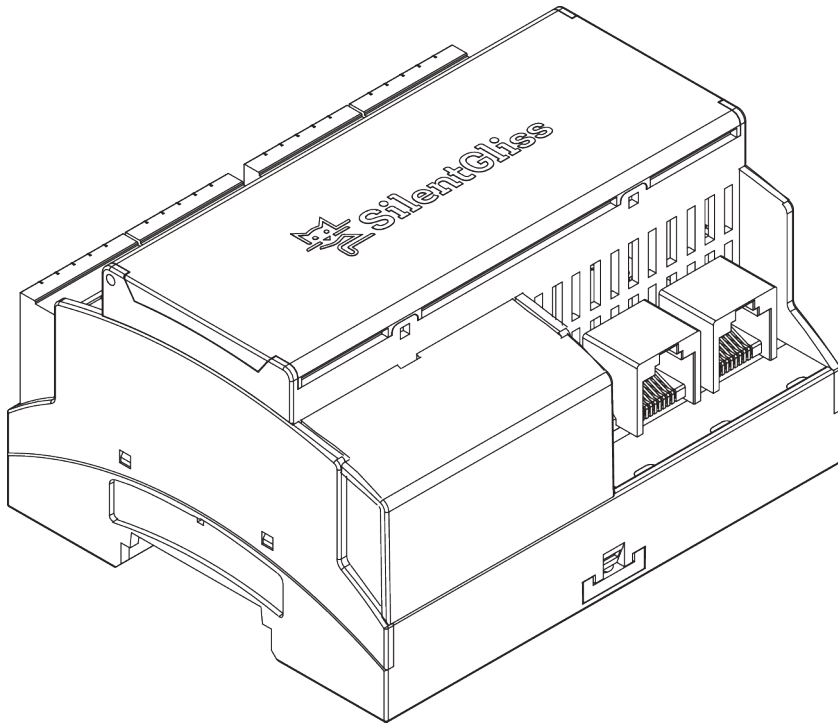

## PRODUCT INFORMATION

- *Two way communication between motors and control system*
- *Works in conjunction with specific third party control systems*
- *Precise motor control*
- *Wide range of Silent Gliss product types*


# APPLICATION

## **A. SYSTEMS**

- Dim-out blind system SG 4760
- Dim-out blind system SG 4770
- Dim-out blind system SG 4780
- Electric curtain track system SG 5600
- Roller blind system SG 4960
- Roller blind system SG 4970
- Roller blind system SG 4880
- Roman blind system SG 2350
- Panel glide system SG 2750

# OVERVIEW COMPONENTS

## **A. SMART COMPONENTS**




### **SG 11260 Gateway Cedia**

- Din rail mounted

#### **Features:**

- Controls up to 8 motors
- Up to 64 motors when combined with Expansion Units SG 11262
- Key communication link with primary control system
- Plug in connector blocks




### **SG 11261 Gateway KNX**

- Din rail mounted

#### **Features:**

- For use with KNX based control systems
- Key communication link with primary control systems
- Controls up to 8 motors
- Up to 64 motors when combined with expansion units SG 11262
- Plug in connector blocks




### **SG 11262 Expansion Unit**

- Din Rail mounted
- Used in conjunction with Gateways

#### **Features:**

- Controls up to 8 motors
- Plug in connector blocks




#### **SG 11270 Smart Module**

- Smart Module for SG 5600 system
- Works exclusively with Smart Gateway components

#### **Features:**

- Simple "plug in" module for SG 9060 motors
- Screw connector blocks

## **B. POWER SUPPLIES**




#### **SG 11263 Power Supply**

- 24 V DC 2.5 A output
- Din rail mounted

#### **Features:**

- Powers Gateway components SG 11260 / SG 11261
- Variable input voltage
- Output range 21.6 - 29 V DC




#### **SG 11264 Power Supply**

- 24 V DC 3.8 A output
- Din Rail mounted

#### **Features:**

- Variable input voltage
- Output range 21.6 - 29 V DC




#### **SG 11265 Power Supply**

- 24 V DC 5 A output
- Din rail mounted

#### **Features:**

- Variable input voltage
- Output range 24 - 28 V DC



#### **SG 11266 Power Supply**

- 24 V DC 10 A output
- Din rail mounted


#### **Features:**

- Variable input voltage
- Output range 24 - 28 V DC

# COMBINATION CONTROLS AND SYSTEMS

## A. EXAMPLE

### Schematic Smart system arrangement

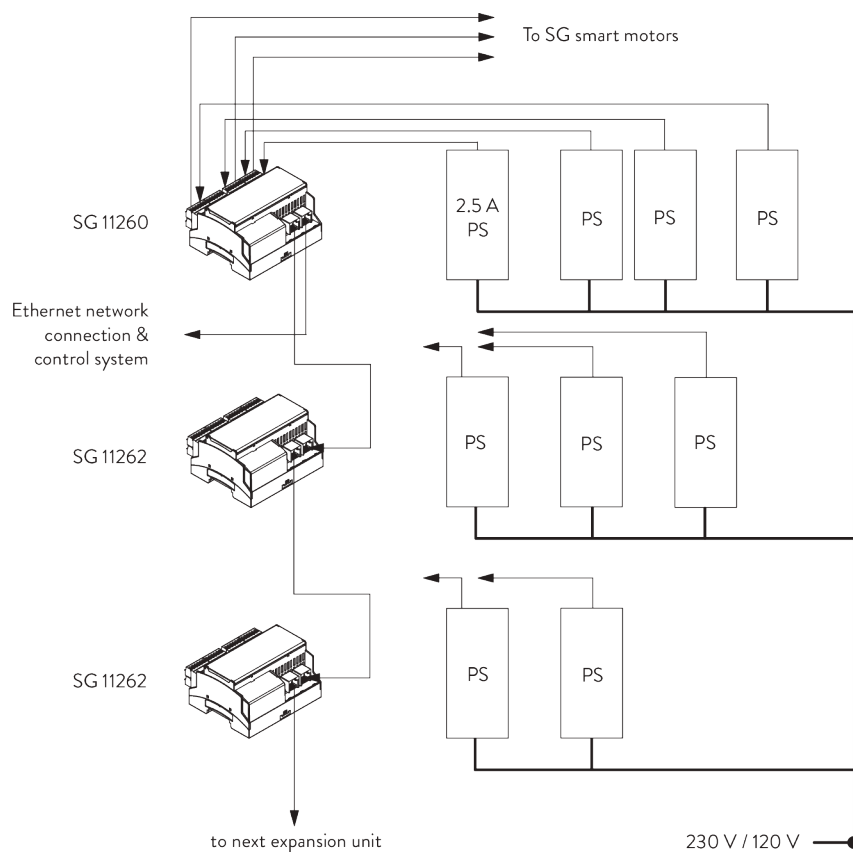














## B. WIRING DIAGRAMS



Refer to Silent Gliss website.

# PARTS

## A. SMART COMPONENTS

	<b>SG 11250</b> Smart motor 24V DC, 50-Series S 1.5/55
	<b>SG 11251</b> Tubular motor 24V DC, 50-Series S 3/32
	<b>SG 11252</b> Tubular motor 24V DC, 50-Series S 6/20
	<b>SG 11255</b> Tubular motor 24V DC, 50-Series M 10/20
	<b>SG 11260</b> Gateway Cedia
	<b>SG 11261</b> Gateway KNX
	<b>SG 11262</b> Expansion unit
	<b>SG 11263</b> Power supply 24V DC, 2 Ampere DIN Rail
	<b>SG 11264</b> Power supply 24V DC, 3.8 Ampere DIN Rail
	<b>SG 11265</b> Power supply 24V DC, 5 Ampere DIN Rail
	<b>SG 11266</b> Power supply 24V DC, 10 Ampere DIN Rail
	<b>SG 11270</b> Smart module
	<b>SG 11325</b> Smart plug 6-pin, MC 1.5/6 ST-3.81

## ***The Architects of Silence***

***Silent Gliss is the leading global supplier of premium interior window treatments. Since 1952 we have been tirelessly committed to the development of the worlds` smoothest, quietest systems using state of the art technology.***

*Driven by customer needs, Silent Gliss offers functional and durable products. Expert technical advice coupled with installation and support services complete the offer. Silent Gliss stands for innovative, sustainable, tailor made solutions, exceptional design and first-class quality.*

### **Silent Gliss Nordic AB**

Box 9008

213 77 Malmö

Sweden

**T** +46 40 55 52 50

info@silentgliss.se

Byggdøy Allé 111A

0273 Oslo

Norway

**T** +47 24 11 80 60

info@silentgliss.no

Denmark

**T** +45 36 77 67 00

info@silentgliss.dk

**silentgliss.se**

**silentgliss.no**

**silentgliss.dk**